

## Options

For Style 5S / 12S




- **BT Chrono ref. : 936400**  
Elapsed time control unit (hour minute second)  
Count-up and down operation  
Split time  
For hospitals, recording studios, sportshalls...  
Supplied with a 5-m cable (Max. length 20m.).

For Style 12




- **Temperature probe ref. : 935011**  
Supplied with a 5-m cable.

## Dimensions (mm)

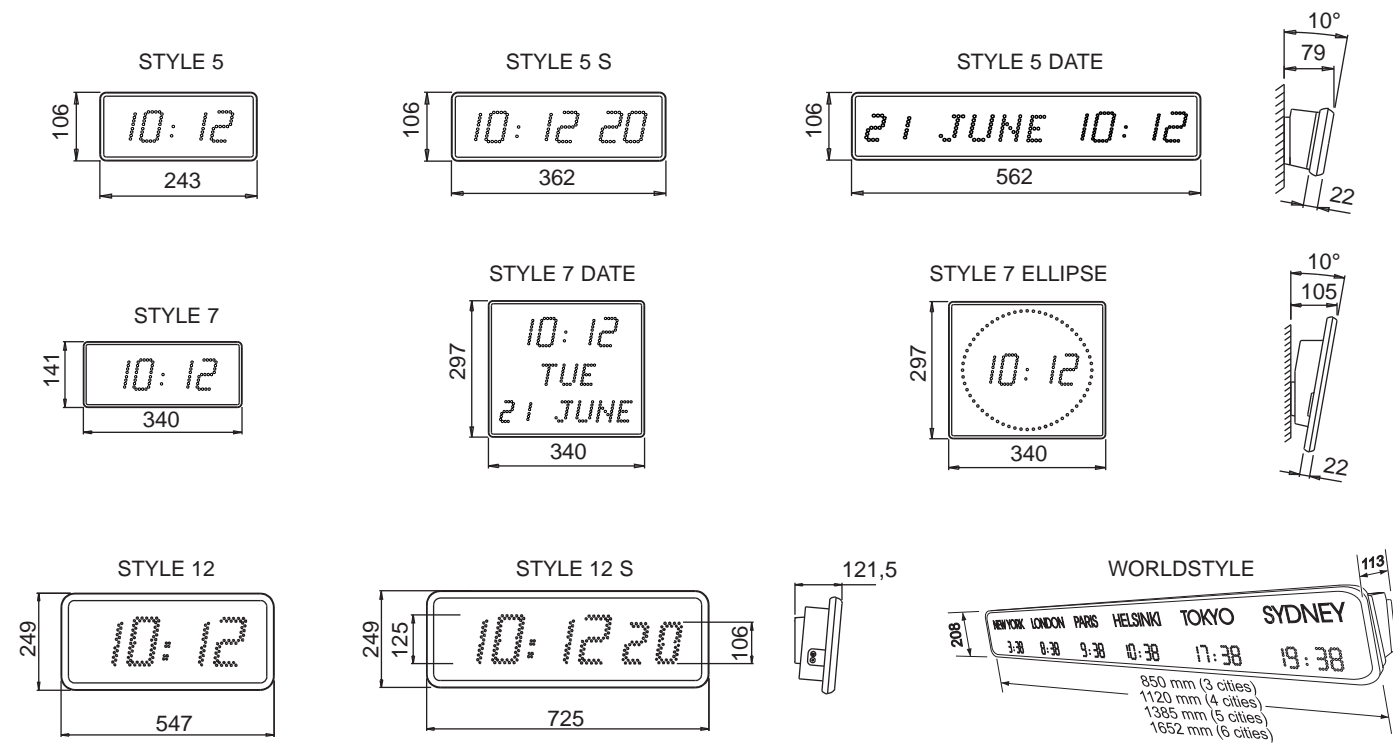

## Mounting

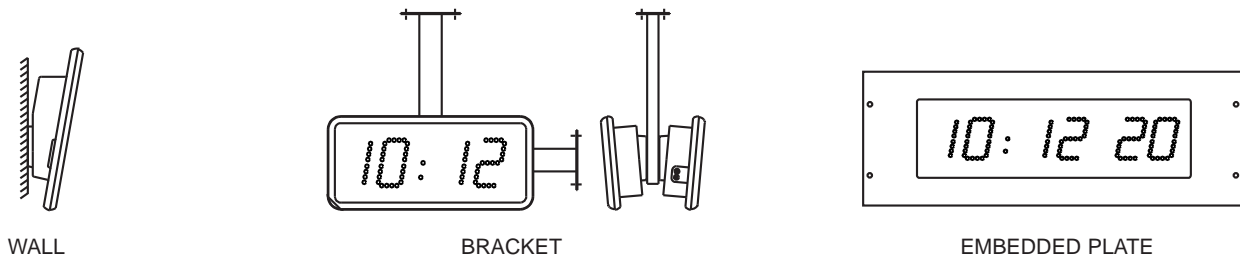

# Luminous digital clocks



PO BOX 1  
49340 Trémentines  
FRANCE

Tel. (33) 2 41 71 72 00  
Fax (33) 2 41 71 72 02  
export@bodet.com  
www.bodet.com



Technical features and  
aesthetical aspects  
are subject to change  
without notice

CE

Spinaker - 02 41 55 06 35 - Ref. 653401 G0612



## Technical features

*Style*

### Common features

- Power supply: 230V -10% 50/60Hz.
- Brightness setting on 4 levels.
- Automatic pre-programmed summer/winter time changeover.
- Large viewing angle filter.
- Time basis accuracy 0.2 sec/day - Absolute with radio antenna.
- Silent operation.
- Programming and time setting through two buttons.
- Viewing angle: 120°.

### Style 5/7 features

- Injected ABS casing (fireproof) - Matt black.
- Data back-up for 7 days in case of power failure.
- 12 or 24 hours display mode.
- Perpetual calendar.
- Operating temperature : -5 to +50°C.

### Style 12 features

- Aluminium casing - Matt black.
- Data back-up for 3 days in case of power failure.
- Red or Yellow high brightness LED providing perfect outdoor reading.
- Manual adjustment of brightness on 4 levels for indoor clock. Automatic adjustment of brightness through photo cells for outdoor clock.
- Automatic adjustment of brightness through photo cells for outdoor clock.

### LED colours



*Style* 5 range, 5-cm display

For indoor

**Style 5**  
Display: hour minute or alternating with date or week number

**Style 5 S**  
Display: hour minute second  
Option: timer control unit with clock/time and count-up/count-down switches for remote control of the clock in operating theatres, recording studios...

**Style 5 date**  
Display: hour minute  
Multilingual calendar  
Possibility to alternate 2 languages among 14.  
Perpetual calendar

*Style* 7 range, 7-cm display

For indoor

**Style 7**  
Display: hour minute or alternating with date or week number.

**Style 7 date**  
Display: hour minute date  
Multilingual calendar  
Day of the week, week number or day number (1 to 365)  
Possibility to alternate 2 languages among 14  
Perpetual calendar.

**Style 7 Ellipse**  
Display: hour minute and sweep second or alternating with date or week number.

*Style* 12 range, 12-cm display

For indoor / outdoor

**Style 12**  
Display: hour minute  
Option: temperature probe to display alternately time and temperature.

**Style 12 S**  
Display: hour minute second  
Option: timer control unit with clock/time and count-up/count-down switches for remote control of the clock in operating theatres, recording studios...

*World Style* range, 5-cm display

For indoor

**WorldStyle 3 cities**  
NEW YORK LONDON PARIS  
4:12 9:12 10:12

**WorldStyle 4 cities**  
NEW YORK LONDON PARIS TOKYO  
4:12 9:12 10:12 18:12

**WorldStyle 5 cities**  
NEW YORK PARIS HELSINKI TOKYO SYDNEY  
4:12 10:12 11:12 18:12 19:12

**WorldStyle 6 cities**  
NEW YORK LONDON PARIS HELSINKI TOKYO SYDNEY  
4:12 9:12 10:12 11:12 18:12 19:12

Display: hour minute  
Choice of city text  
Local times programmed in factory and modifiable on site.  
Automatic time changeover.

**Multi time zone display clock**

	STYLE 5	STYLE 5 S	STYLE 5 DATE	STYLE 7	STYLE 7 DATE	STYLE 7 ELLIPSE	STYLE 12	STYLE 12 S	WORLD STYLE 3 V	WORLD STYLE 4 V	WORLD STYLE 5 V	WORLD STYLE 6 V
Digit height (mm)	50 mm	50 mm	50 mm	Digit 70 mm	Digit 70 mm Letter 50 mm	Digit 70 mm	125 mm	125 mm	50 mm	50 mm	50 mm	50 mm
Viewing Distance (m)	20	20	20	25	25	25	50	50	20	20	20	20
Weight (kg)	0,8	1,1	1,6	1,1	2,1	2,2	5	6,3	9	12	15	18
Protection index	IP 30	IP 30	IP 30	IP 30	IP 30	IP 30	Indoor : IP 51 Outdoor : IP 53	Indoor : IP 51 Outdoor : IP 53	IP 41	IP 41	IP 41	IP 41
Power (W)	9,2	12,7	23	15	34,5	18,4	12,4	19,5	27,6	36,8	46	55,2

**Bodet**

Operation: Independent or impulse receiver  
Radio synchronised by France Inter or DCF (except Style 5 range)  
AFNOR receiver  
DHF receiver  
NTP receiver via NTP/AFNOR interface