

Options and mounting accessories

■ Table bracket



Option table bracket available for all models

■ Double sided bracket



Option double sided bracket (wall or ceiling mounting) available for all models


■ Recessed mounted plate





Option recessed mounted plate available for *Opalys 14*

Dimensions in mm



Opalys 7

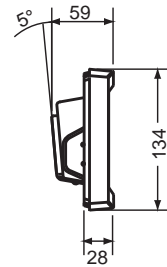

Opalys 14

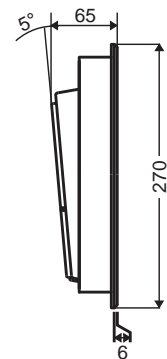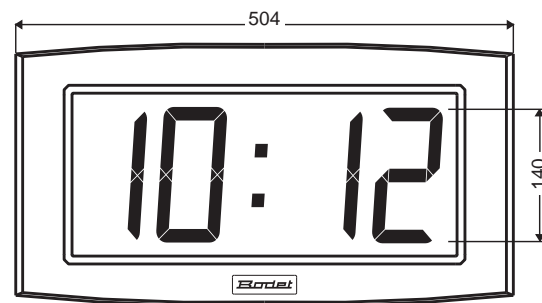

Opalys Date / Ellipse

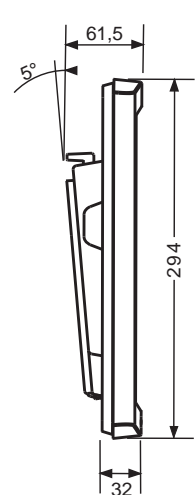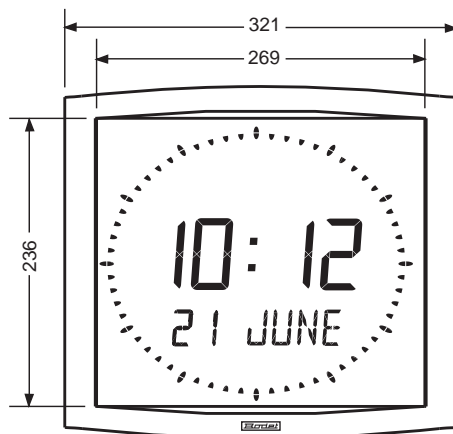

Opalys

Backlighting
LCD clocks



PO BOX 1
49340 TREMENTINES
FRANCE

Tel. (33) 2 41 71 72 00
Fax (33) 2 41 71 72 02
E-mail: export@bodet.com
Internet: www.bodet.com



Sprinkler - 02 41 55 05 35 - Ref. 653591 E0909



Technical features

Opalys

Futuristic design

- Indoor wall-mounted clock with extra-slim case.
- Back-lighted LCD display. Very wide viewing angle with a perfect contrast.
- Silent running.

General features

- ABS case, aluminium colour, indoor use, IP40.
- Wall-fixing bracket with anti-theft system.
- Operating temperature: 0 to 50°C.
- 2 keys for programming and time setting.
- External power supply: 230 VAC.
- Time base accuracy: 0.2 sec/day (adjustable). Absolute time base accuracy with radio synchronisation (France Inter or DCF).
- 12 or 24 hour display mode.
- Pre-programmed summer/winter changeovers and perpetual calendar with multi-time zones.
- ECO function: display and backlighting switched off from 11pm to 6am ensuring energy saving costs.

Special features

Opalys Date / Ellipse

- Multi-function display: 18 languages for Opalys Date, 12 languages for Opalys Ellipse. Ambient temperature displayed in °C or °F.

Opalys 14

- Ambient temperature displayed in °C or °F. Can display date or year.

Opalys 7 7 cm display



Fixed or alternate display



24 hour display mode



12 hour display mode



Numerical date or week number

Opalys 14 14 cm display



Fixed or alternate display



Time display



Temperature display



Date or year display

Opalys Ellipse 6 cm display



Fixed or alternate display



Time and temperature display or numerical day/week



Multilingual alphanumerical date



Numerical date



Day and week number



7 character text display

Opalys Date 7 cm display



Fixed or alternate display on the middle or lower line



Indoor temperature



City or site names



Event countdown



Numerical or multilingual alphanumerical date



Day and week number



Second counter

| | OPALYS 7 | OPALYS 14 | OPALYS ELLIPSE | OPALYS DATE |
|--------------|----------|-----------|------------------------------|------------------------------|
| Digit height | 70 mm | 140 mm | Digit 60 mm Letters 40 mm | Digit 70 mm Letters 50 mm |
| Readability | 30 | 60 | 25 | 30 |
| Weight in kg | 0,7 | 2 | 1,4 | 1,4 |

Operation:

- independent clock, radio-synchronised,
- slave clock on impulses or AFNOR time signal,
- wireless slave clock.
- NTP PoE (Power over Ethernet) slave clock

Bodet